
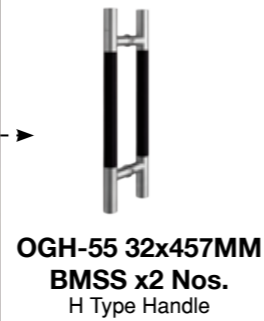


EAZY - 55

Single Swing Door

- OZHN-DP-PR-33 4M ABM**
- OPF-2 STD BM x 1Nos.**
- OFS-ACC-GDP STD BM x 1 Nos.**
Top Pivot for Patch/Point Fitting Doors
- OZHN-DP1-CC STD MILL x2 Nos.**
Corner Cleat

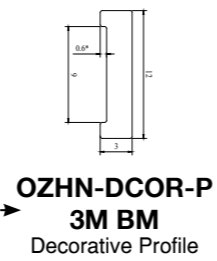

- OZHN-I10MM 3M BM**
OZHN-I12MM 3M BM
Profile-GTG-180



- OCFH-100 STD BM X 1 Nos.**
The Original SELF-CLOSING Patch Fitting





- OPL-1 STD BM X 1Nos.**
Corner Patch Lock with Strike Plate





Refer to the Ozone glass hardware range for more choices

TYPICAL LAYOUT


- OZHN-DP-PR-33 4M ABM**
- OPF-2 STD BM x 1Nos.**
- OFS-ACC-GDP STD BM x 1 Nos.**
- OZHN-DP1-CC STD MILL x2 Nos.**
Corner Cleat
- OZHN-L10MM 3M BM**
OZHN-L12MM 3M BM
L Profile-GTG-90

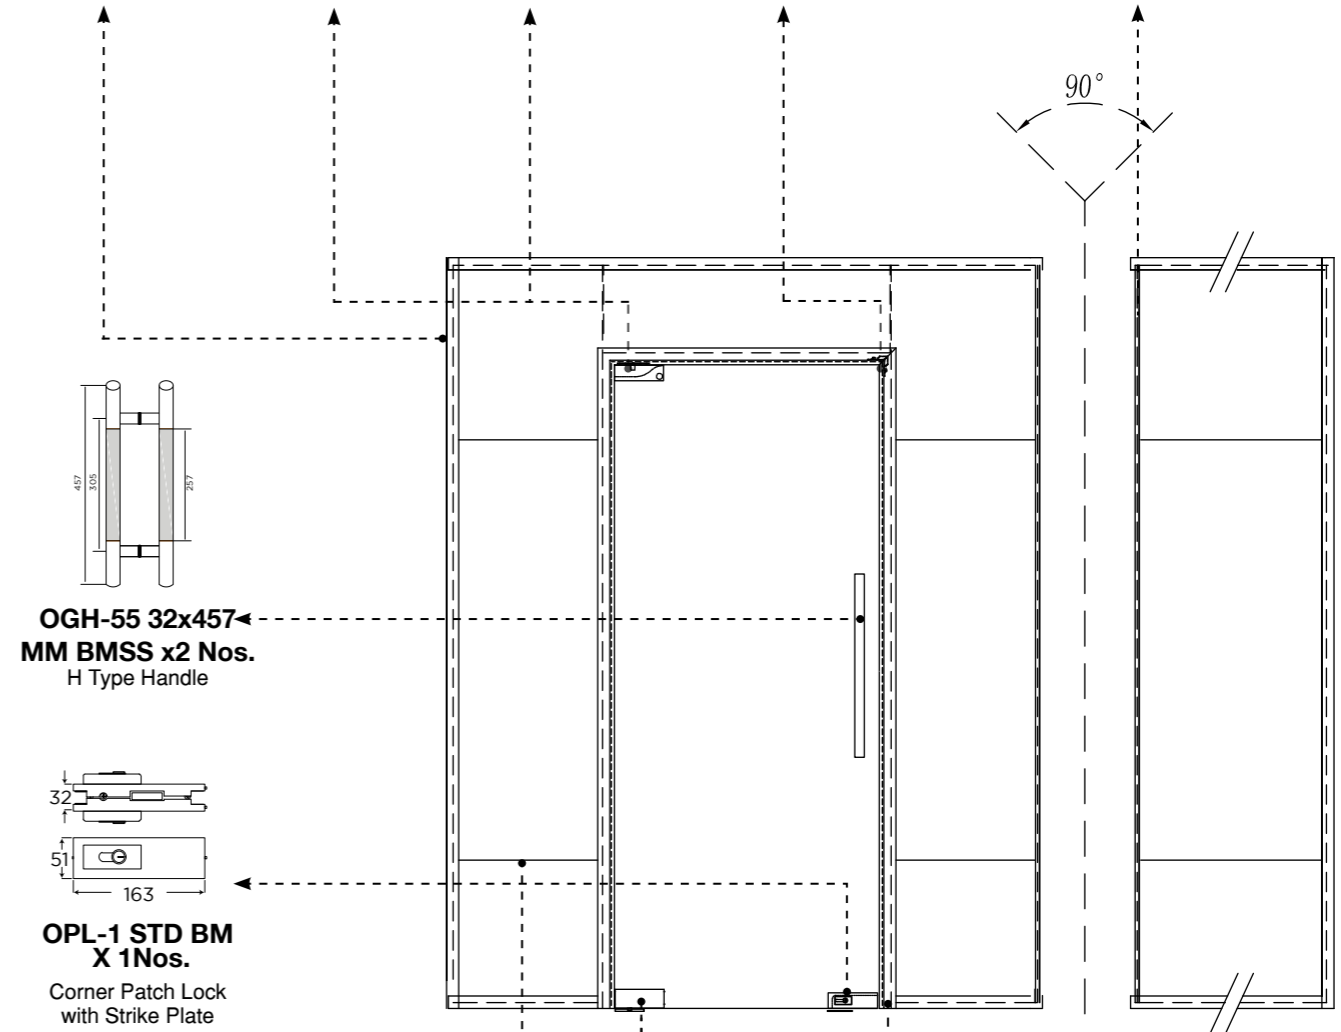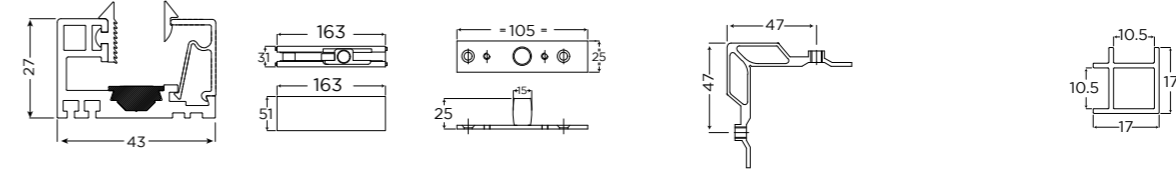

- OGH-55 32x457MM BMSS x2 Nos.**
H Type Handle



- OPL-1 STD BM X 1Nos.**
Corner Patch Lock with Strike Plate




- OZHN-DCOR-P 3M BM**
Decorative Profile


Technical Specification

Glass Type	Tempered Glass
Glass Thickness	10-12mm
Max. Door Height	3000mm
Max. Partition Height	3000mm
Door Weight	45-80kg
Application	Door assembly with Over Panel and Sidelight
Material	Aluminium


- OCFH-100 STD BM X 1 Nos.**
The Original SELF-CLOSING Patch Fitting



- OZHN-DP3 3M ABM**



- OZHN-DP1-GK 10MM BL**
OR
OZHN-DP1-GK 12MM BL



Note: The number of the profiles may change as per actual site measurement.